

combipump

WASTE WATER MANAGEMENT

Specifications

Max Temperature: 96°C
Operating Temperature: 85°C

Electrical
Phase - Single 239 Volts 50HZ
Current - 2.45 Amps FLC
Motor output - 0.4kW
Pump speed - 2800 RPM

Max Input Flow: 45 litres per minute*
Output Flow: 50 litres per minute*
*subject to drain conditions

Max Head: 7 metres


Cabinet
15 litre capacity
Inlet water connection - 1 1/2" connection (Deflector and connector supplied)
Outlet water connection - 3/4" BSP PVC

Installation video



watercare.co.uk



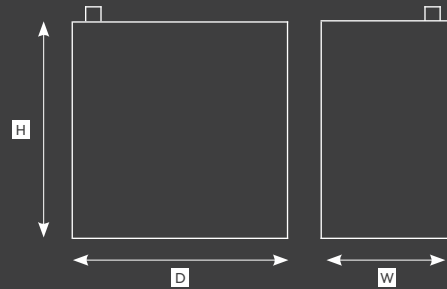

Model	HxWxD (mm)	Max Input Flow	Output Flow	Code
Combi Pump CB4 for combi ovens pumps as low as 40mm from floor	470x250x450	45 litres per min (subject to drain connection)	50 litres per min	COMBIPUMP-4
Combi Pump CB7 for combi ovens pumps as low as 70mm from floor	470x250x450	45 litres per min (subject to drain connection)	50 litres per min	COMBIPUMP-7

Please note: must be fitted to tundish.

Application

Low-level waste water pump for combi ovens

Solving waste water issues

The only solution specifically designed for pumping waste water from island based combination ovens at only 40mm from floor level. Where floor gully drainage is absent or where ovens are sited away from the drainage points of the kitchen such as islands.

The WaterCare CombiPump series has been designed and developed by our own research and development team at the request of a leading combination oven manufacturer specifically requiring waste water from their oven to be pumped away at a height of just 40mm from the floor.

The new improved CombiPump range has a capacity to pump away up to 50 litres per min which not only means it can now be connected to 2 ovens but also gives it the versatility to be used in various other circumstances where drain water is required to be removed and no immediate drainage is available.

CombiPump Selection & Differences

The EWC Combi Pump is available in two colour coded models for easy identification. The CombiPump4 comes in a Light Blue Cabinet and the CombiPump7 in a distinctive Deep Green Blue.

The CB4 is designed to be used on ovens where the waste outlet from the oven is as low 40mm from the floor and requires the pump to activate at that level in order to prevent backflow into the oven.

The CB7 allows for a waste outlet up to 70mm with the pump activating at this higher level.

