



autosoft+

PROFESSIONAL WATER SOFTENING

Specifications

Media Vessel (QTY) Size: (2) 6 x 13 mm
Resin Volume: 4.5 Litres per vessel
Dimensions WxDxH: 356 x 356 x 559 mm
Weight (Shipping/Operating): 27.2 / 49.9 kg
Salt Capacity: 18 kg

Inlet Pressure range: 2.5 – 8.5 Bar **
Temperature range: 2 – 65°C
PH range: 5 – 10 SU
Free Chlorine CL2 Max: 2 mg/l
Hardness as CaCO3 Max: 513 mg/l

Minimum Flow: 2 lpm
Flow Rate @ 1 bar pressure drop: 25 lpm
Flow Rate @ 2 bar pressure drop: 41 lpm

Regeneration volume/time: 19 litres / 11 minutes
Salt used per regeneration: 0.45 kg


**The system will not operate properly if the inlet pressure fluctuates below a dynamic pressure of 2 bar. This minimum pressure must be maintained to the system at all times. Should the pressure fluctuate below this level, a booster pump may be required.

The non-electric, high performance water softener

For hot or cold fed glasswashers, dishwashers and laundry washing machines. The AutoSoft+ water softener is a non-electric, high performance system, specially designed for applications where space is limited.



watercare.co.uk

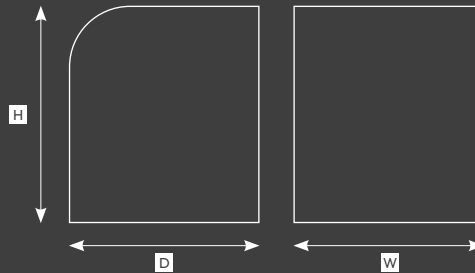

Model	H	W	D	Code
Autosoft+ water softener	559	356	356	AUTOSOFT+

Application

For hot or cold fed glasswashers, dishwashers and laundry washing machines. The AutoSoft+ water softener is a non-electric, high performance system, specially designed for applications where space is limited. In addition to the clever, space-saving design, the softeners are packed with features making them an ideal choice, even when space is not at a premium.

Small, but mighty

The perfect solution for reducing limescale entering your professional dishwashers and glasswashers. With an innovative twin tank system, the unit can provide a constant stream of softened water with no down times - when regeneration is required, the unit simply switches to the other tank. Compact and effective, the AutoSoft+ helps to reduce down times and maintenance on your warewashing machines. Enjoy prolonged equipment life, more efficient washing and professional results every time.

Professional results every time

Our specialist softeners produce soft water that help produce sparkling clean crockery, cutlery and streak-free glassware. Glasswashers and dishwashers are also protected from the harmful effects of chlorine and scale. Enjoy prolonged equipment life and more efficient washing.

Features & Benefits

- Twin Tank Design - Guarantees a continuous and uninterrupted supply of soft water.
- Non-Electric - Powered by the kinetic energy of moving water
- Metered water use, the system only regenerates when necessary
- Cabinet with wheels for easy movement.
- Uses soft, conditioned water to self-clean, prolonging the life of the unit.
- Economical to use, highly efficient system - low salt consumption.
- Regenerates from the bottom up for an even and efficient use of the resin beads, resulting in less waste, less salt and longer lasting system.
- For use on a hot or cold feed.

